

HL45 Resin Ribbon

- A highly durable resin ribbon suitable for flat head printers
- Designed for printing onto synthetic media
- Excellent scratch and smear resistance
- Resists petrol & brake fluid
- UL listed




RESIN FLATHEAD

Technical Specification

Ink Composition	Resin
Colours	Black
Film Thickness	4.5µ + 0.5µ
Total Thickness	7.0µ + 1.0µ
Ink Melting Point	95°C
Max Print Speed	100mm/ Sec

Print Performance

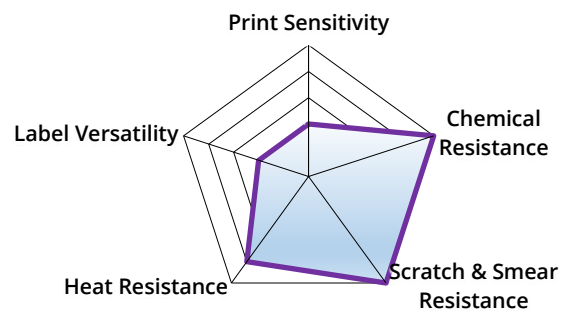

Applications



AUTOMOTIVE



AVIATION



CHEMICAL



PETROL



FOOD

Approvals · Compliance



REACH- SVHC FREE



FDA Listed



UL Listed



ISO 9001:2015



ISO 14001:2015



HALOGEN FREE



ROHS

Recommended Stock

Synthetic Media
(PP, PE, PVC, PET etc)

DYNIC (UK) LTD
Trident Business Park
Cardiff
CF24 5EP
United Kingdom

Tel +44 (0) 2920 483 973
Fax +44 (0) 2920 486 706
www.dynic.co.uk

Storage

Temperature	5°C to 35°C
Relative Humidity	30% to 80%
Shelf life	12 months
Keep away from direct sunlight	
MSDS Available upon request	